


HGFT-PR

Oil level indicators
with prismatic window



ELESA Original design

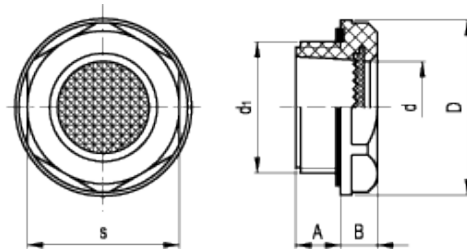

technical informations

Material

Polyamide based (PA) technopolymer. Resistant to solvents, oils, greases and other chemical agents.

Colour

Black, glossy finish.

Prismatic window

Transparent polyamide based (PA-T/AR) technopolymer. Resistant to alcohol, solvents, oils with additives, greases, acids and alkali. The window consists of a continuous series of prisms which provide a clear and immediate reading of the level of the oil contained in the reservoir.



Flat packing ring

NBR synthetic rubber.

Maximum continuous working temperature

100°C at 3 bar pressure.

Accessories on request

Brass nut type [GH](#) for fitting to reservoirs with wall thickness smaller than 5 mm.

Technical data

An adequate tightening torque (see table below) is recommended when screwing the oil level indicator, so as to guarantee optimal tightness without any deformation of the packing ring. Suggested tightening torque is the result of laboratory tests at ambient temperature (23°C) with indicator, packing ring and reservoir walls perfectly cleaned.

Note

For use with fluids containing special additives, please contact ELESA Sales Department.

Standard Elements		Main dimensions						Tightening torque	Weight
Code	Description	d ₁	A	B	D	d	s	[Nm]	g
14462	HGFT.13/PR-1/2-C9	G 1/2	10	8.5	28	14.5	24	6÷8	5
14482	HGFT.16/PR-3/4-C9	G 3/4	9.5	8.5	35	18	32	8÷10	9
14522	HGFT.21/PR-1-C9	G 1	11	9.5	42.5	23	38	10÷12	14
14542	HGFT.25/PR-1¼-C9	G 1¼	11	9	50	30	46	12÷15	30



ELESA and GANTER models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings.

STANDARD MACHINE ELEMENTS WORLDWIDE