

# Tandremskiver HTD® - 3M



3M		Deling: 3mm			Materiale: Aluminium (ALU)								
6082TG UNI 9006/4													
Type	Matr.	Antal tænder	Rem-bredde	Type se s. 53	Dp	De	Df	Dm	Di	F	L	d	
10-3M-6	ALU	10	6	1F	9,55	8,79	13	6	-	7,2	14,5	4	
12-3M-6	ALU	12	6	1F	11,46	10,7	15	8	-	7,2	14,5	4	
14-3M-6	ALU	14	6	1F	13,37	12,61	16	9,5	-	7,2	14,5	4	
15-3M-6	ALU	15	6	1F	14,32	13,56	17,5	11,6	-	7,2	14,5	4	
16-3M-6	ALU	16	6	6F	15,28	14,52	18	10	-	9,8	17,5	4	
18-3M-6	ALU	18	6	6F	17,19	16,43	20	11	-	9,8	17,5	6	
20-3M-6	ALU	20	6	6F	19,1	18,34	23	13	-	9,8	17,5	6	
21-3M-6	ALU	21	6	6F	20,05	19,29	25	13	-	9,8	17,5	6	
22-3M-6	ALU	22	6	6F	21,01	20,25	25	13	-	9,8	17,5	6	
24-3M-6	ALU	24	6	6F	22,92	22,16	25	13	-	9,8	17,5	6	
26-3M-6	ALU	26	6	6F	24,83	24,07	28	16	-	9,8	17,5	6	
28-3M-6	ALU	28	6	6F	26,74	25,98	32	18	-	9,8	17,5	6	
30-3M-6	ALU	30	6	6F	28,65	27,89	32	20	-	9,8	17,5	6	
32-3M-6	ALU	32	6	6F	30,56	29,8	36	22	-	9,8	17,5	6	
36-3M-6	ALU	36	6	6F	34,38	33,62	38	26	-	10,3	18	6	
40-3M-6	ALU	40	6	6F	38,2	37,44	42	28	-	10,3	18	6	
44-3M-6	ALU	44	6	6F	42,02	41,26	48	33	-	10,3	18	6	
48-3M-6	ALU	48	6	6	45,84	45,08	-	33	-	10,3	18,6	8	
60-3M-6	ALU	60	6	6	57,3	56,54	-	33	-	10,3	18,6	8	
72-3M-6	ALU	72	6	6	68,75	67,99	-	33	-	10,3	18,6	8	
10-3M-9	ALU	10	9	1F	9,55	8,79	13	6	-	10,2	17,5	4	
12-3M-9	ALU	12	9	1F	11,46	10,7	15	8	-	10,2	17,5	4	
14-3M-9	ALU	14	9	1F	13,37	12,61	16	9,5	-	10,2	17,5	4	
15-3M-9	ALU	15	9	1F	14,32	13,56	17,5	11,6	-	10,2	17,5	4	
16-3M-9	ALU	16	9	6F	15,28	14,52	18	10	-	12,8	20,6	4	
18-3M-9	ALU	18	9	6F	17,19	16,43	20	11	-	12,8	20,6	6	
20-3M-9	ALU	20	9	6F	19,1	18,34	23	13	-	12,8	20,6	6	
21-3M-9	ALU	21	9	6F	20,05	19,29	25	13	-	12,8	20,6	6	
22-3M-9	ALU	22	9	6F	21,01	20,25	25	13	-	12,8	20,6	6	
24-3M-9	ALU	24	9	6F	22,92	22,16	25	13	-	12,8	20,6	6	
26-3M-9	ALU	26	9	6F	24,83	24,07	28	16	-	12,8	20,6	6	
28-3M-9	ALU	28	9	6F	26,74	25,98	32	18	-	12,8	20,6	6	
30-3M-9	ALU	30	9	6F	28,65	27,89	32	20	-	12,8	20,6	6	
32-3M-9	ALU	32	9	6F	30,56	29,8	36	22	-	12,8	20,6	6	
36-3M-9	ALU	36	9	6F	34,38	33,62	38	26	-	13,4	22,2	6	
40-3M-9	ALU	40	9	6F	38,2	37,44	42	28	-	13,4	22,2	6	
44-3M-9	ALU	44	9	6F	42,02	41,26	48	33	-	13,4	22,2	6	
48-3M-9	ALU	48	9	6	45,84	45,08	-	33	-	13,4	22,2	8	
60-3M-9	ALU	60	9	6	57,3	56,54	-	33	-	13,4	22,2	8	
72-3M-9	ALU	72	9	6	68,75	67,99	-	33	-	13,4	22,2	8	
10-3M-15	ALU	10	15	1F	9,55	8,79	13	6	-	17	26	4	
12-3M-15	ALU	12	15	1F	11,46	10,7	15	8	-	17	26	4	
14-3M-15	ALU	14	15	1F	13,37	12,61	16	9,5	-	17	26	4	
15-3M-15	ALU	15	15	1F	14,32	13,56	17,5	11,6	-	17	26	4	
16-3M-15	ALU	16	15	6F	15,28	14,52	18	10	-	19,5	26	4	
18-3M-15	ALU	18	15	6F	17,19	16,43	20	11	-	19,5	26	6	
20-3M-15	ALU	20	15	6F	19,1	18,34	23	12	-	19,5	26	6	
21-3M-15	ALU	21	15	6F	20,05	19,29	25	13	-	19,5	26	6	
22-3M-15	ALU	22	15	6F	21,01	20,25	25	13	-	19,5	26	6	
24-3M-15	ALU	24	15	6F	22,92	22,16	25	13	-	19,5	26	6	
26-3M-15	ALU	26	15	6F	24,83	24,07	28	16	-	19,5	26	6	
28-3M-15	ALU	28	15	6F	26,74	25,98	32	18	-	19,5	26	6	
30-3M-15	ALU	30	15	6F	28,65	27,89	32	20	-	19,5	26	6	
32-3M-15	ALU	32	15	6F	30,56	29,8	36	22	-	19,5	26	6	
36-3M-15	ALU	36	15	6F	34,38	33,62	38	26	-	20	30	6	
40-3M-15	ALU	40	15	6F	38,2	37,44	42	28	-	20	30	6	
44-3M-15	ALU	44	15	6F	42,02	41,26	48	33	-	20	30	6	
48-3M-15	ALU	48	15	6	45,84	45,08	-	33	-	20	30	8	
60-3M-15	ALU	60	15	6	57,3	56,54	-	33	-	20	30	8	
72-3M-15	ALU	72	15	6	68,75	67,99	-	33	-	20	30	8	



# Tandremskiver HTD® - 5M

5M		Deling: 5mm			Materiale: Stål (S)							
					Aluminium (ALU)							
Type	Matr.	Antal tænder	Rem-bredde	Type se s. 53	Dp	De	Df	Dm	Di	F	L	d
12-5M-9	S	12	9	6F	19,1	17,96	23	12	-	14,5	20	4
14-5M-9	S	14	9	6F	22,28	21,14	25	13	-	14,5	20	6
15-5M-9	S	15	9	6F	23,87	22,73	28	16	-	14,5	20	6
16-5M-9	S	16	9	6F	25,46	24,32	28	16,5	-	14,5	20	6
18-5M-9	S	18	9	6F	28,65	27,51	32	20	-	14,5	20	6
20-5M-9	S	20	9	6F	31,83	30,69	36	23	-	14,5	22,5	6
21-5M-9	S	21	9	6F	33,42	32,28	38	24	-	14,5	22,5	6
22-5M-9	S	22	9	6F	35,01	33,87	38	25,5	-	14,5	22,5	6
24-5M-9	S	24	9	6F	38,2	37,06	42	27	-	14,5	22,5	6
26-5M-9	S	26	9	6F	41,38	40,24	44	30	-	14,5	22,5	6
28-5M-9	S	28	9	6F	44,56	43,42	48	30,5	-	14,5	22,5	6
30-5M-9	S	30	9	6F	47,75	46,6	51	35	-	14,5	22,5	6
32-5M-9	S	32	9	6F	50,93	49,79	54	38	-	14,5	22,5	8
36-5M-9	S	36	9	6F	57,3	56,16	60	38	-	14,5	22,5	8
40-5M-9	S	40	9	6F	63,66	62,52	70	38	-	14,5	22,5	8
44-5M-9	S	44	9	6W	70,03	68,89	-	38	54	14,5	25,5	8
48-5M-9	ALU	48	9	6W	76,39	75,25	-	45	61	14,5	25,5	8
60-5M-9	ALU	60	9	6W	95,46	94,35	-	45	80	14,5	25,5	8
72-5M-9	ALU	72	9	6W	114,59	113,45	-	45	100	14,5	25,5	8
12-5M-15	S	12	15	6F	19,1	17,96	23	12	-	20,5	26	4
14-5M-15	S	14	15	6F	22,28	21,14	25	13	-	20,5	26	6
15-5M-15	S	15	15	6F	23,87	22,73	28	16	-	20,5	26	6
16-5M-15	S	16	15	6F	25,46	24,32	28	16,5	-	20,5	26	6
18-5M-15	S	18	15	6F	28,65	27,51	32	20	-	20,5	26	6
20-5M-15	S	20	15	6F	31,83	30,69	36	23	-	20,5	26	6
21-5M-15	S	21	15	6F	33,42	32,28	38	24	-	20,5	26	6
22-5M-15	S	22	15	6F	35,01	33,87	38	25,5	-	20,5	26	6
24-5M-15	S	24	15	6F	38,2	37,06	42	27	-	20,5	28	6
26-5M-15	S	26	15	6F	41,38	40,24	44	30	-	20,5	28	6
28-5M-15	S	28	15	6F	44,56	43,42	48	30,5	-	20,5	28	6
30-5M-15	S	30	15	6F	47,75	46,6	51	35	-	20,5	28	6
32-5M-15	S	32	15	6F	50,93	49,79	54	38	-	20,5	28	8
36-5M-15	S	36	15	6F	57,3	56,16	60	38	-	20,5	28	8
40-5M-15	S	40	15	6F	63,66	62,52	70	38	-	20,5	28	8
44-5M-15	ALU	44	15	6W	70,03	68,89	-	38	54	20,5	30	8
44-5M-15	ALU	44	15	6W	70,03	68,89	-	38	54	30,5	40	8
48-5M-15	ALU	48	15	6W	76,39	75,25	-	45	61	20,5	30	8
48-5M-15	ALU	48	15	6W	76,39	75,25	-	45	61	30,5	40	8
60-5M-15	ALU	60	15	6W	95,46	94,35	-	45	80	20,5	30	8
60-5M-15	ALU	60	15	6W	95,46	94,35	-	45	80	30,5	40	8
72-5M-15	ALU	72	15	6W	114,59	113,45	-	45	100	20,5	30	8
72-5M-15	ALU	72	15	6W	114,59	113,45	-	45	100	30,5	40	8
12-5M-25	S	12	25	6F	19,1	17,96	23	12	-	30,5	36	4
14-5M-25	S	14	25	6F	22,28	21,14	25	13	-	30,5	36	6
15-5M-25	S	15	25	6F	23,87	22,73	28	16	-	30,5	36	6
16-5M-25	S	16	25	6F	25,46	24,32	28	16,5	-	30,5	36	6
18-5M-25	S	18	25	6F	28,65	27,51	32	20	-	30,5	36	6
20-5M-25	S	20	25	6F	31,83	30,69	36	23	-	30,5	36	6
21-5M-25	S	21	25	6F	33,42	32,28	38	24	-	30,5	38	6
22-5M-25	S	22	25	6F	35,01	33,87	38	25,5	-	30,5	38	6
24-5M-25	S	24	25	6F	38,2	37,06	42	27	-	30,5	38	6
26-5M-25	S	26	25	6F	41,38	40,24	44	30	-	30,5	38	6
28-5M-25	S	28	25	6F	44,56	43,42	48	30,5	-	30,5	38	6
30-5M-25	S	30	25	6F	47,75	46,6	51	35	-	30,5	38	6
32-5M-25	S	32	25	6F	50,93	49,79	54	38	-	30,5	38	8
36-5M-25	S	36	25	6F	57,3	56,16	60	38	-	30,5	38	8
40-5M-25	S	40	25	6F	63,66	62,52	70	38	-	30,5	38	8

# Tandremskiver HTD® - 8M



8M		Deling: 8mm			Materiale: Stål (S)							
					Støbejern (GG)							
Type	Matr.	Antal tænder	Rem-bredde	Type se s. 53	Dp	De	Df	Dm	Di	F	L	d
22-8M-20	S	22	20	6F	56,02	54,65	60	43	-	28	38	12
24-8M-20	S	24	20	6F	61,12	59,75	66	45	-	28	38	12
26-8M-20	S	26	20	6F	66,21	64,84	70	48	-	28	38	12
28-8M-20	S	28	20	6F	71,3	70,08	75	50	-	28	38	15
30-8M-20	S	30	20	6F	76,39	75,13	83	55	-	28	38	15
32-8M-20	S	32	20	6F	81,49	80,16	87	60	-	28	38	15
34-8M-20	S	34	20	6F	86,58	85,22	91	70	-	28	38	15
36-8M-20	S	36	20	6F	91,67	90,3	97	75	-	28	38	15
38-8M-20	S	38	20	6F	96,77	95,39	102	75	-	28	38	15
40-8M-20	S	40	20	6F	101,86	100,49	106	75	-	28	38	15
44-8M-20	S	44	20	6F	112,05	110,67	120	75	-	28	38	15
48-8M-20	S	48	20	6F	122,23	120,86	128	75	-	28	38	15
56-8M-20	S	56	20	6WF	142,6	141,23	150	80	116	28	38	15
64-8M-20	S	64	20	6WF	162,97	161,6	168	80	137	28	38	15
72-8M-20	S	72	20	6WF	183,35	181,97	192	80	158	28	38	15
80-8M-20	GG	80	20	6W	203,72	202,35	-	90	180	28	38	15
90-8M-20	GG	90	20	6A	229,18	227,81	-	90	204	28	38	15
112-8M-20	GG	112	20	6A	285,21	283,83	-	90	254	28	38	18
144-8M-20	GG	144	20	6A	366,69	365,32	-	90	336	28	38	20
168-8M-20	GG	168	20	6A	427,81	426,44	-	100	400	28	38	20
192-8M-20	GG	192	20	6A	488,92	487,55	-	100	460	28	38	20
22-8M-30	S	22	30	6F	56,02	54,65	60	43	-	38	48	12
24-8M-30	S	24	30	6F	61,12	59,75	66	45	-	38	48	12
26-8M-30	S	26	30	6F	66,21	64,84	70	48	-	38	48	12
28-8M-30	S	28	30	6F	71,3	70,08	75	50	-	38	48	15
30-8M-30	S	30	30	6F	76,39	75,13	83	55	-	38	48	15
32-8M-30	S	32	30	6F	81,49	80,16	87	60	-	38	48	15
34-8M-30	S	34	30	6F	86,58	85,22	91	70	-	38	48	15
36-8M-30	S	36	30	6F	91,67	90,3	97	75	-	38	48	15
38-8M-30	S	38	30	6F	96,77	95,39	102	75	-	38	48	15
40-8M-30	S	40	30	6F	101,86	100,49	106	75	-	38	48	15
44-8M-30	S	44	30	6F	112,05	110,67	120	75	-	38	48	15
48-8M-30	S	48	30	6F	122,23	120,86	128	75	-	38	48	15
56-8M-30	S	56	30	6WF	142,6	141,23	150	90	116	38	48	15
64-8M-30	S	64	30	6WF	162,97	161,6	168	90	137	38	48	15
72-8M-30	S	72	30	6WF	183,35	181,97	192	95	158	38	48	15
80-8M-30	GG	80	30	6W	203,72	202,35	-	100	180	38	48	15
90-8M-30	GG	90	30	6A	229,18	227,81	-	100	204	38	48	15
112-8M-30	GG	112	30	6A	285,21	283,83	-	100	254	38	48	18
144-8M-30	GG	144	30	6A	366,69	365,32	-	100	336	38	48	20
168-8M-30	GG	168	30	6A	427,81	426,44	-	100	400	38	48	20
192-8M-30	GG	192	30	6A	488,92	487,55	-	100	460	38	48	20
22-8M-50	S	22	50	6F	56,02	54,65	60	43	-	60	70	12
24-8M-50	S	24	50	6F	61,12	59,75	66	45	-	60	70	12
26-8M-50	S	26	50	6F	66,21	64,84	70	48	-	60	70	15
28-8M-50	S	28	50	6F	71,3	70,08	75	50	-	60	70	15
30-8M-50	S	30	50	6F	76,39	75,13	83	55	-	60	70	15
32-8M-50	S	32	50	6F	81,49	80,16	87	60	-	60	70	15
34-8M-50	S	34	50	6F	86,58	85,22	91	66	-	60	70	15
36-8M-50	S	36	50	6F	91,67	90,3	97	70	-	60	70	15
38-8M-50	S	38	50	6F	96,77	95,39	102	75	-	60	70	15
40-8M-50	S	40	50	6F	101,86	100,49	106	75	-	60	70	18
44-8M-50	S	44	50	6F	112,05	110,67	120	75	-	60	70	18
48-8M-50	S	48	50	6F	122,23	120,86	128	80	-	60	70	18
56-8M-50	S	56	50	10WF	142,6	141,23	150	90	116	60	60	18
64-8M-50	S	64	50	10WF	162,97	161,6	168	100	137	60	60	18
72-8M-50	S	72	50	10WF	183,35	181,97	192	100	158	60	60	18
80-8M-50	GG	80	50	10W	203,72	202,35	-	110	180	60	60	18
90-8M-50	GG	90	50	10A	229,18	227,81	-	110	204	60	60	18
112-8M-50	GG	112	50	10A	285,21	283,83	-	110	254	60	60	18
144-8M-50	GG	144	50	10A	366,69	365,32	-	110	336	60	60	20
168-8M-50	GG	168	50	10A	427,81	426,44	-	120	400	60	60	20
192-8M-50	GG	192	50	10A	488,92	487,55	-	130	460	60	60	20



## Tandremskiver HTD® - 8M

8M		Deling: 8mm			Materiale: Stål (S)							
Støbejern (GG)												
Type	Matr.	Antal tænder	Rem-bredde	Type se s. 53	Dp	De	Df	Dm	Di	F	L	d
22-8M-85	S	22	85	6F	56,02	54,65	60	43	-	95	105	12
24-8M-85	S	24	85	6F	61,12	59,75	66	45	-	95	105	12
26-8M-85	S	26	85	6F	66,21	64,84	70	48	-	95	105	12
28-8M-85	S	28	85	6F	71,3	70,08	75	50	-	95	105	15
30-8M-85	S	30	85	6F	76,39	75,13	83	55	-	95	105	15
32-8M-85	S	32	85	6F	81,49	80,16	87	60	-	95	105	15
34-8M-85	S	34	85	6F	86,58	85,22	91	66	-	95	105	15
36-8M-85	S	36	85	6F	91,67	90,3	97	70	-	95	105	15
38-8M-85	S	38	85	6F	96,77	95,39	102	75	-	95	105	15
40-8M-85	S	40	85	6F	101,86	100,49	106	75	-	95	105	18
44-8M-85	S	44	85	6F	112,05	110,67	120	75	-	95	105	18
48-8M-85	S	48	85	6F	122,23	120,86	128	80	-	95	105	18
56-8M-85	S	56	85	6F	142,6	141,23	150	90	-	95	105	18
64-8M-85	S	64	85	10WF	162,97	161,6	168	100	137	95	95	20
72-8M-85	GG	72	85	10WF	183,35	181,97	192	100	158	95	95	20
80-8M-85	GG	80	85	10W	203,72	202,35	-	110	180	95	95	20
90-8M-85	GG	90	85	10A	229,18	227,81	-	110	204	95	95	20
112-8M-85	GG	112	85	10A	285,21	283,83	-	110	254	95	95	24
144-8M-85	GG	144	85	10A	366,69	365,32	-	110	336	95	95	24
168-8M-85	GG	168	85	10A	427,81	426,44	-	120	400	95	95	24
192-8M-85	GG	192	85	10A	488,92	487,55	-	130	460	95	95	24














# Tandremskiver HTD® - 14M



14M		Deling: 14mm				Materiale: Stål (S)						
						Støbejern (GG)						
Type	Matr.	Antal tænder	Rem- bredde	Type se s. 53	Dp	De	Df	Dm	Di	F	L	d
28-14M-40	S	28	40	6F	124,78	122,12	128	100	-	54	69	24
29-14M-40	S	29	40	6F	129,23	126,57	138	100	-	54	69	24
30-14M-40	S	30	40	6F	133,69	130,99	138	100	-	54	69	24
32-14M-40	S	32	40	6F	142,6	139,88	154	100	-	54	69	24
34-14M-40	S	34	40	6F	151,52	148,79	160	100	-	54	69	24
36-14M-40	S	36	40	6F	160,43	157,68	168	100	-	54	69	24
38-14M-40	S	38	40	6F	169,34	166,6	184	120	-	54	69	24
40-14M-40	S	40	40	6F	178,25	175,49	188	120	-	54	69	24
44-14M-40	S	44	40	6F	196,08	193,28	212	120	-	54	69	24
48-14M-40	GG	48	40	6WF	213,9	211,11	226	135	170	54	69	24
56-14M-40	GG	56	40	6WF	249,55	246,76	256	135	207	54	69	28
64-14M-40	GG	64	40	6WF	285,21	282,41	296	135	240	54	69	28
72-14M-40	GG	72	40	6A	320,86	318,06	-	135	278	54	69	28
80-14M-40	GG	80	40	6A	356,51	353,71	-	135	314	54	69	28
90-14M-40	GG	90	40	6A	401,07	398,28	-	135	358	54	69	28
112-14M-40	GG	112	40	6A	499,11	496,32	-	135	456	54	69	28
144-14M-40	GG	144	40	6A	641,71	638,92	-	135	600	54	69	28
168-14M-40	GG	168	40	6A	748,66	745,87	-	135	706	54	69	28
192-14M-40	GG	192	40	6A	855,62	852,82	-	135	813	54	69	28
216-14M-40	GG	216	40	6A	962,57	959,76	-	150	920	54	69	28
28-14M-55	S	28	55	6F	124,78	122,12	128	100	-	70	85	24
29-14M-55	S	29	55	6F	129,23	126,57	138	100	-	70	85	24
30-14M-55	S	30	55	6F	133,69	130,99	138	100	-	70	85	24
32-14M-55	S	32	55	6F	142,6	139,88	154	100	-	70	85	24
34-14M-55	S	34	55	6F	151,52	148,79	160	100	-	70	85	24
36-14M-55	S	36	55	6F	160,43	157,68	168	100	-	70	85	24
38-14M-55	S	38	55	6F	169,34	166,6	184	120	-	70	85	24
40-14M-55	S	40	55	6F	178,25	175,49	188	120	-	70	85	24
44-14M-55	S	44	55	6F	196,08	193,28	212	120	-	70	85	24
48-14M-55	GG	48	55	10WF	213,9	211,11	226	135	170	70	70	24
56-14M-55	GG	56	55	10WF	249,55	246,76	256	135	207	70	70	28
64-14M-55	GG	64	55	10WF	285,21	282,41	296	135	240	70	70	28
72-14M-55	GG	72	55	10A	320,86	318,06	-	135	278	70	70	28
80-14M-55	GG	80	55	10A	356,51	353,71	-	135	314	70	70	28
90-14M-55	GG	90	55	10A	401,07	398,28	-	135	358	70	70	28
112-14M-55	GG	112	55	10A	499,11	496,32	-	135	456	70	70	28
144-14M-55	GG	144	55	10A	641,71	638,92	-	135	600	70	70	28
168-14M-55	GG	168	55	10A	748,66	745,87	-	135	706	70	70	28
192-14M-55	GG	192	55	10A	855,62	852,82	-	135	813	70	70	28
216-14M-55	GG	216	55	10A	962,57	959,76	-	150	920	70	70	28
28-14M-85	S	28	85	6F	124,78	122,12	128	100	-	102	117	24
29-14M-85	S	29	85	6F	129,23	126,57	138	100	-	102	117	24
30-14M-85	S	30	85	6F	133,69	130,99	138	100	-	102	117	24
32-14M-85	S	32	85	6F	142,6	139,88	154	100	-	102	117	24
34-14M-85	S	34	85	6F	151,52	148,79	160	100	-	102	117	24
36-14M-85	S	36	85	6F	160,43	157,68	168	100	-	102	117	32
38-14M-85	S	38	85	6F	169,34	166,6	184	120	-	102	117	32
40-14M-85	S	40	85	6F	178,25	175,49	188	135	-	102	117	32
44-14M-85	S	44	85	6F	196,08	193,28	212	135	-	102	117	32
48-14M-85	S	48	85	6F	213,9	211,11	226	150	-	102	117	32
56-14M-85	GG	56	85	10WF	249,55	246,76	256	150	207	102	117	32
64-14M-85	GG	64	85	10WF	285,21	282,41	296	150	240	102	102	32
72-14M-85	GG	72	85	10A	320,86	318,06	-	150	278	102	102	32
80-14M-85	GG	80	85	10A	356,51	353,71	-	150	314	102	102	32
90-14M-85	GG	90	85	10A	401,07	398,28	-	150	358	102	102	32
112-14M-85	GG	112	85	10A	499,11	496,32	-	150	456	102	102	32
144-14M-85	GG	144	85	10A	641,71	638,92	-	150	600	102	102	32
168-14M-85	GG	168	85	10A	748,66	745,87	-	150	706	102	102	32
192-14M-85	GG	192	85	10A	855,62	852,82	-	165	813	102	102	32
216-14M-85	GG	216	85	10A	962,57	959,76	-	165	920	102	102	32

Rembredde 115 og 170 mm fås på forespørgsel.

Desuden fås tandremskiver HTD® også i 20M for rembredde 115, 170, 230, 290 og 340 mm.

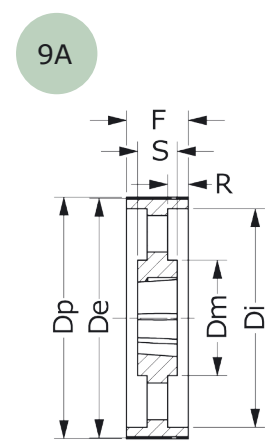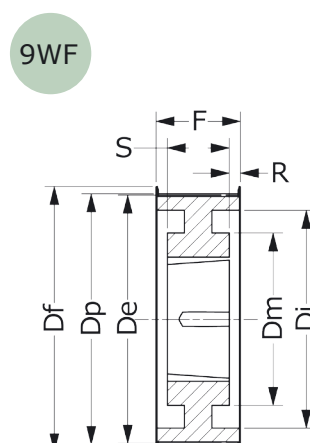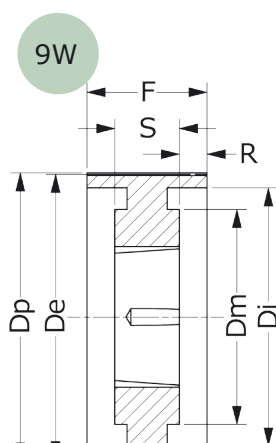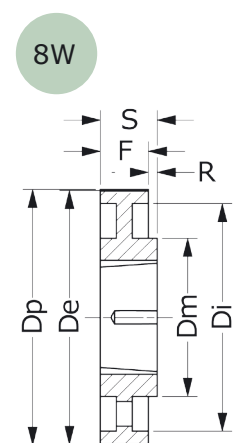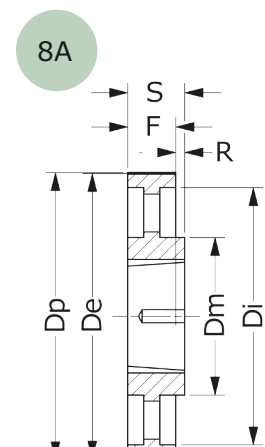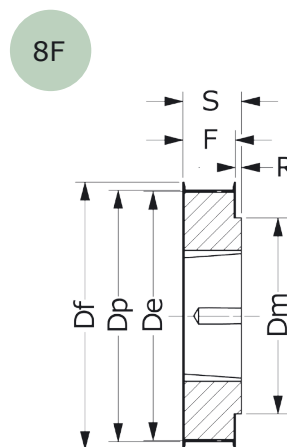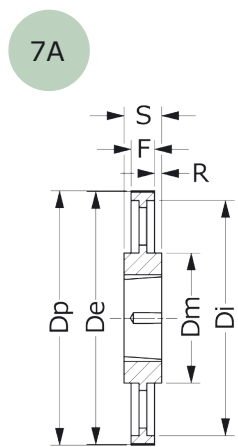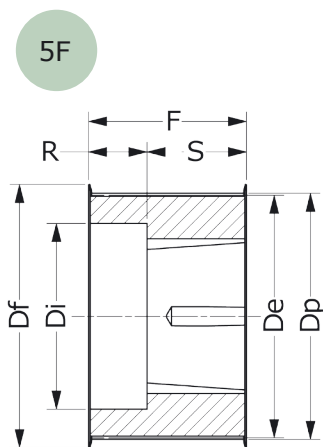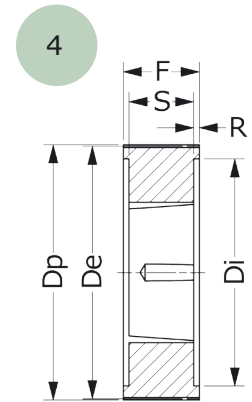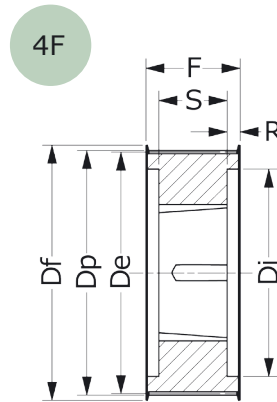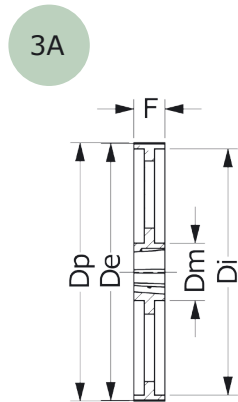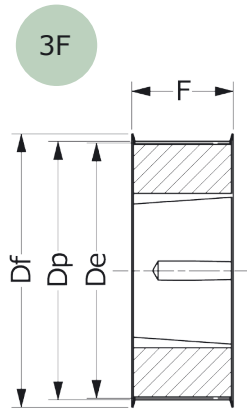



# Tandremskiver HTD® - taperbøsning 5M/8M



5M		Deling: 5mm											Materiale: Stål (S)	
Type	Matr.	Antal tænder	Rem-bredde	Type se s. 59	TB-nr.	Dp	De	Df	Dm	Di	F	S	R	
34-5M-15	S	34	15	3F	1008	54,11	52,97	57	-	-	22	22	-	
36-5M-15	S	36	15	3F	1108	57,3	56,15	60	-	-	22	22	-	
38-5M-15	S	38	15	3F	1108	60,48	59,34	66	-	-	22	22	-	
40-5M-15	S	40	15	3F	1108	63,66	62,52	70	-	-	22	22	-	
44-5M-15	S	44	15	3F	1108	70,03	68,89	75	-	-	22	22	-	
48-5M-15	S	48	15	8F	1210	76,39	75,25	83	59	-	22	25	3	
56-5M-15	S	56	15	8F	1210	89,13	87,98	93	70	-	22	25	3	
64-5M-15	S	64	15	8F	1210	101,86	100,72	106	80	-	22	25	3	
72-5M-15	S	72	15	8A	1610	114,59	113,45	-	92	-	22	25	3	
80-5M-15	S	80	15	8A	1610	127,32	126,18	-	92	-	22	25	3	
90-5M-15	S	90	15	8A	1610	143,24	142,1	-	92	-	22	25	3	
112-5M-15	S	112	15	8A	2012	178,25	177,11	-	110	-	20	32	12	
136-5M-15	S	136	15	7A	2012	216,45	215,31	-	110	199	20	32	6	

8M		Deling: 8mm											Materiale: Stål (S)	
													Støbejern (GG)	
Type	Matr.	Antal tænder	Rem-bredde	Type se s. 59	TB-nr.	Dp	De	Df	Dm	Di	F	S	R	
22-8M-20	S	22	20	5F	1108	56,02	54,65	60	-	37	28	22	6	
24-8M-20	S	24	20	5F	1108	61,12	59,75	66	-	44	28	22	6	
26-8M-20	S	26	20	5F	1108	66,21	64,84	70	-	45	28	22	6	
28-8M-20	S	28	20	5F	1108	71,3	70,08	75	-	50	28	22	6	
30-8M-20	S	30	20	5F	1108	76,39	75,13	83	-	58	28	22	6	
32-8M-20	S	32	20	5F	1610	81,49	80,16	87	-	63	28	25	3	
34-8M-20	S	34	20	5F	1610	86,58	85,22	91	-	64	28	25	3	
36-8M-20	S	36	20	5F	1610	91,67	90,3	97	-	68	28	25	3	
38-8M-20	S	38	20	5F	1610	96,77	95,39	102	-	72	28	25	3	
40-8M-20	S	40	20	5F	1610	101,86	100,49	106	-	76	28	25	3	
44-8M-20	S	44	20	8F	2012	112,05	110,67	120	93	-	28	32	4	
48-8M-20	S	48	20	8F	2012	122,23	120,86	128	96	-	28	32	4	
56-8M-20	S	56	20	8F	2012	142,6	141,23	150	110	-	28	32	4	
64-8M-20	S	64	20	9WF	2012	162,97	161,6	168	110	137	28	32	4	
72-8M-20	S	72	20	9WF	2012	183,35	181,97	192	110	158	28	32	4	
80-8M-20	GG	80	20	8W	2012	203,72	202,35	-	110	180	28	32	4	
90-8M-20	GG	90	20	8A	2012	229,18	227,81	-	110	204	28	32	4	
144-8M-20	GG	144	20	8A	2517	366,69	365,32	-	125	336	28	32	4	
22-8M-30	S	22	30	5F	1108	56,02	54,65	60	-	37	38	22	16	
24-8M-30	S	24	30	5F	1108	61,12	59,75	66	-	44	38	22	16	
26-8M-30	S	26	30	5F	1108	66,21	64,84	70	-	44	38	22	16	
28-8M-30	S	28	30	5F	1210	71,3	70,08	75	-	50	38	25	13	
30-8M-30	S	30	30	3F	1615	76,39	75,13	83	-	-	38	38	-	
32-8M-30	S	32	30	3F	1615	81,49	80,16	87	-	-	38	38	-	
34-8M-30	S	34	30	3F	1615	86,58	85,22	91	-	-	38	38	-	
36-8M-30	S	36	30	3F	1615	91,67	90,3	97	-	-	38	38	-	
38-8M-30	S	38	30	3F	1615	96,77	95,39	102	-	-	38	38	-	
40-8M-30	S	40	30	3F	1615	101,86	100,49	106	-	-	38	38	-	
44-8M-30	S	44	30	4F	2012	112,05	110,67	120	-	86	38	32	3	
48-8M-30	S	48	30	4F	2012	122,23	120,86	128	-	90	38	32	3	
56-8M-30	S	56	30	4F	2012	142,6	141,23	150	-	110	38	32	3	
64-8M-30	S	64	30	8F	2517	162,97	161,6	192	125	-	38	45	7	
72-8M-30	S	72	30	9WF	2517	183,35	181,97	-	125	158	38	45	7	
80-8M-30	GG	80	30	8W	2517	203,72	202,35	-	125	180	38	45	7	
90-8M-30	GG	90	30	8A	2517	229,18	227,81	-	125	204	38	45	7	
112-8M-30	GG	112	30	8A	2517	285,21	283,83	-	125	254	38	45	7	
144-8M-30	GG	144	30	8A	2517	366,69	365,32	-	125	336	38	45	7	





## Tandremskiver HTD® - taperbøsning 8M

8M		Deling: 8mm				Materiale: Stål (S)							
						Støbejern (GG)							
Type	Matr.	Antal tænder	Rem-bredde	Type se s. 59	TB-nr.	Dp	De	Df	Dm	Di	F	S	R
28-8M-50	S	28	50	4F	1210	71,3	70,08	75	-	50	60	25	17,5
30-8M-50	S	30	50	5F	1615	76,39	75,13	83	-	58	60	38	22
32-8M-50	S	32	50	5F	1615	81,49	80,16	87	-	62	60	38	22
34-8M-50	S	34	50	5F	1615	86,58	85,22	91	-	65	60	38	22
36-8M-50	S	36	50	5F	1615	91,67	90,3	97	-	68	60	38	22
38-8M-50	S	38	50	5F	1615	96,77	95,39	102	-	72	60	38	22
40-8M-50	S	40	50	4F	2012	101,86	100,49	106	-	82	60	32	14
44-8M-50	S	44	50	4F	2012	112,05	110,67	120	-	91	60	32	14
48-8M-50	S	48	50	4F	2012	122,23	120,86	128	-	95	60	32	14
56-8M-50	S	56	50	4F	2517	142,6	141,23	150	-	116	60	45	7,5
64-8M-50	S	64	50	4F	2517	162,97	161,6	168	-	137	60	45	7,5
72-8M-50	S	72	50	9WF	2517	183,35	181,97	192	125	158	60	45	7,5
80-8M-50	GG	80	50	4	3020	203,72	202,35	-	-	180	60	51	4,5
90-8M-50	GG	90	50	9W	3020	229,18	227,81	-	170	204	60	51	4,5
112-8M-50	GG	112	50	9W	3020	285,21	283,83	-	170	260	60	51	4,5
144-8M-50	GG	144	50	9A	3020	366,69	365,32	-	170	341	60	51	4,5
168-8M-50	GG	168	50	7A	3525	427,81	426,44	-	198	402	60	65	2,5
192-8M-50	GG	192	50	7A	3525	488,92	487,55	-	198	460	60	65	2,5
34-8M-85	S	34	85	4F	1615	86,58	85,22	91	-	65	95	38	28,5
36-8M-85	S	36	85	4F	1615	91,67	90,3	97	-	68	95	38	28,5
38-8M-85	S	38	85	4F	1615	96,77	95,39	102	-	72	95	38	28,5
40-8M-85	S	40	85	4F	2012	101,86	100,49	106	-	82	95	32	31,5
44-8M-85	S	44	85	4F	2012	112,05	110,67	120	-	91	95	32	31,5
48-8M-85	S	48	85	4F	2517	122,23	120,86	128	-	100	95	45	25
56-8M-85	S	56	85	4F	2517	142,6	141,23	150	-	117	95	45	25
64-8M-85	S	64	85	4F	2517	162,97	161,6	168	-	137	95	45	25
72-8M-85	S	72	85	4F	3020	183,35	181,97	192	-	158	95	51	22
80-8M-85	GG	80	85	4	3020	203,72	202,35	-	-	180	95	51	22
90-8M-85	GG	90	85	9W	3020	229,18	227,81	-	170	204	95	51	22
112-8M-85	GG	112	85	9W	3020	285,21	283,83	-	170	260	95	51	22
144-8M-85	GG	144	85	9A	3525	366,69	365,32	-	198	336	95	65	15
168-8M-85	GG	168	85	9A	3525	427,81	426,44	-	198	395	95	65	15
192-8M-85	GG	192	85	9A	3525	488,92	487,55	-	198	455	95	65	15

# Tandremskiver HTD® - taperbøsning 14M



14M		Deling: 14mm				Materiale: Stål (S)							
						Støbejern (GG)							
Type	Matr.	Antal tænder	Rem-bredde	Type se s. 59	TB-nr.	Dp	De	Df	Dm	Di	F	S	R
28-14M-40	S	28	40	4F	2012	124,78	122,12	128	-	94	54	32	11
29-14M-40	S	29	40	4F	2012	129,23	126,57	138	-	98	54	32	11
30-14M-40	S	30	40	4F	2012	133,69	130,99	138	-	98	54	32	11
32-14M-40	S	32	40	4F	2012	142,6	139,88	154	-	108	54	32	11
34-14M-40	S	34	40	4F	2517	151,52	148,79	160	-	110	54	45	4,5
36-14M-40	S	36	40	4F	2517	160,43	157,68	168	-	120	54	45	4,5
38-14M-40	S	38	40	4F	2517	169,34	166,6	184	-	130	54	45	4,5
40-14M-40	S	40	40	4F	2517	178,25	175,49	188	-	138	54	45	4,5
44-14M-40	S	44	40	4F	3020	196,08	193,28	212	-	155	54	51	1,5
48-14M-40	S	48	40	4F	3020	213,9	211,11	226	-	170	54	51	1,5
56-14M-40	S	56	40	9WF	3020	249,55	246,76	256	170	208	54	51	1,5
64-14M-40	GG	64	40	9WF	3020	285,21	282,41	296	170	240	54	51	1,5
72-14M-40	GG	72	40	9W	3020	320,86	318,06	-	170	280	54	51	1,5
80-14M-40	GG	80	40	9A	3020	356,51	353,71	-	170	315	54	51	1,5
90-14M-40	GG	90	40	9A	3020	401,07	398,28	-	170	360	54	51	1,5
112-14M-40	GG	112	40	9A	3020	499,11	496,32	-	170	457	54	51	1,5
144-14M-40	GG	144	40	9A	3020	641,71	638,92	-	170	600	54	51	1,5
168-14M-40	GG	168	40	9A	3020	748,66	745,87	-	170	706	54	51	1,5
192-14M-40	GG	192	40	7A	3535	855,62	852,82	-	190	813	54	89	17,5
216-14M-40	GG	216	40	7A	3535	962,57	959,76	-	190	920	54	89	17,5
28-14M-55	S	28	55	4F	2012	124,78	122,12	128	-	94	70	32	19
29-14M-55	S	29	55	4F	2012	129,23	126,57	138	-	100	70	32	19
30-14M-55	S	30	55	4F	2517	133,69	130,99	138	-	100	70	45	12,5
32-14M-55	S	32	55	4F	2517	142,6	139,88	154	-	108	70	45	12,5
34-14M-55	S	34	55	4F	2517	151,52	148,79	160	-	110	70	45	12,5
36-14M-55	S	36	55	4F	2517	160,43	157,68	168	-	120	70	45	12,5
38-14M-55	S	38	55	4F	2517	169,34	166,6	184	-	130	70	45	12,5
40-14M-55	S	40	55	4F	2517	178,25	175,49	188	-	138	70	45	12,5
44-14M-55	S	44	55	4F	3020	196,08	193,28	212	-	155	70	51	9,5
48-14M-55	S	48	55	4F	3020	213,9	211,11	226	-	170	70	51	9,5
56-14M-55	S	56	55	9WF	3020	249,55	246,76	256	170	208	70	51	9,5
64-14M-55	S	64	55	9WF	3020	285,21	282,41	296	170	240	70	51	9,5
72-14M-55	GG	72	55	9W	3020	320,86	318,06	-	170	280	70	51	9,5
80-14M-55	GG	80	55	9A	3020	356,51	353,71	-	170	315	70	51	9,5
90-14M-55	GG	90	55	9A	3020	401,07	398,28	-	170	360	70	51	9,5
112-14M-55	GG	112	55	9A	3020	499,11	496,32	-	170	457	70	51	9,5
144-14M-55	GG	144	55	9A	3020	641,71	638,92	-	170	600	70	51	9,5
168-14M-55	GG	168	55	9A	3020	748,66	745,87	-	170	706	70	51	9,5
192-14M-55	GG	192	55	7A	3535	855,62	852,82	-	190	813	70	89	9,5
216-14M-55	GG	216	55	7A	3535	962,57	959,76	-	190	920	70	89	9,5
28-14M-85	S	28	85	4F	2517	124,78	122,12	128	-	98	102	45	28,5
29-14M-85	S	29	85	4F	2517	129,23	126,57	138	-	100	102	45	28,5
30-14M-85	S	30	85	4F	2517	133,69	130,99	138	-	100	102	45	28,5
32-14M-85	S	32	85	4F	2517	142,6	139,88	154	-	108	102	45	28,5
34-14M-85	S	34	85	4F	2517	151,52	148,79	160	-	110	102	45	28,5
36-14M-85	S	36	85	4F	3020	160,43	157,68	168	-	120	102	51	25,5
38-14M-85	S	38	85	4F	3020	169,34	166,6	184	-	130	102	51	25,5
40-14M-85	S	40	85	4F	3020	178,25	175,49	188	-	138	102	51	25,5
44-14M-85	S	44	85	4F	3020	196,08	193,28	212	-	153	102	51	25,5
48-14M-85	S	48	85	4F	3020	213,9	211,11	226	-	170	102	51	25,5
56-14M-85	S	56	85	4F	3525	249,55	246,76	256	-	210	102	65	18,5
64-14M-85	GG	64	85	9WF	3525	285,21	282,41	296	190	240	102	65	18,5
72-14M-85	GG	72	85	9W	3525	320,86	318,06	-	190	280	102	65	18,5
80-14M-85	GG	80	85	9A	3525	356,51	353,71	-	190	315	102	65	18,5
90-14M-85	GG	90	85	9A	3525	401,07	398,28	-	190	360	102	65	18,5
112-14M-85	GG	112	85	9A	3525	499,11	496,32	-	190	457	102	65	18,5
144-14M-85	GG	144	85	9A	3525	641,71	638,92	-	190	600	102	65	18,5
168-14M-85	GG	168	85	9A	3525	748,66	745,87	-	190	706	102	65	18,5
192-14M-85	GG	192	85	3A	4040	855,62	852,82	-	190	813	102	102	-
216-14M-85	GG	216	85	3A	4040	962,57	959,76	-	190	920	102	102	-

Rembredde 115 og 170 mm  
fås på forespørgsel.

Se hele programmet samt aktuelle lagertal på [www.klee.dk](http://www.klee.dk)