

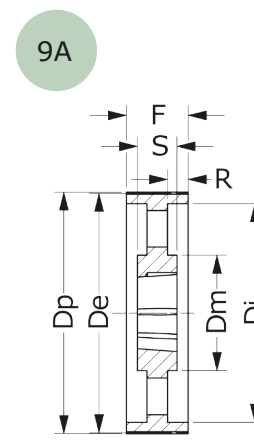
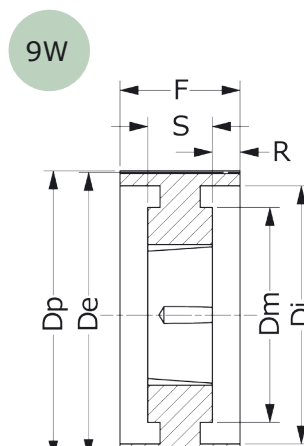
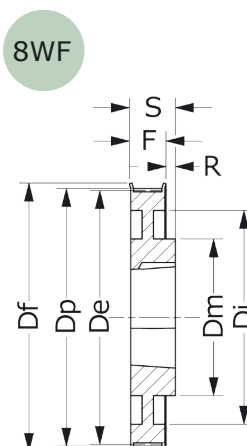
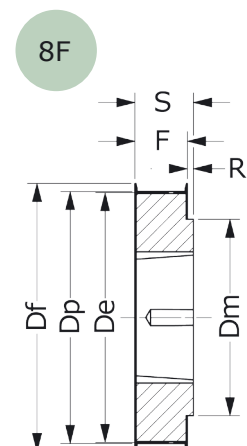
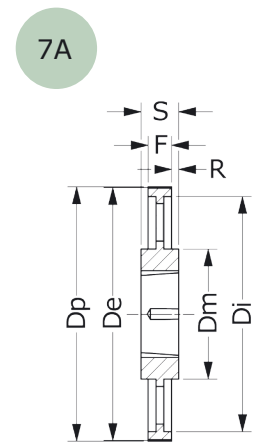
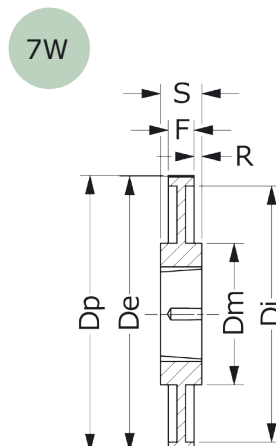
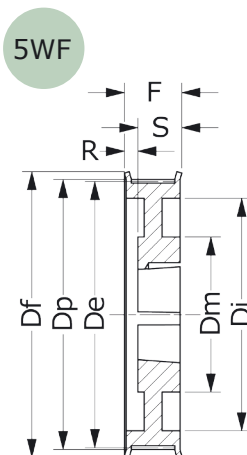
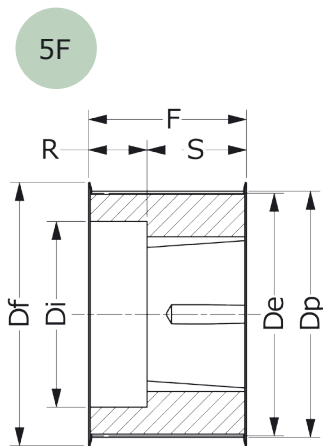
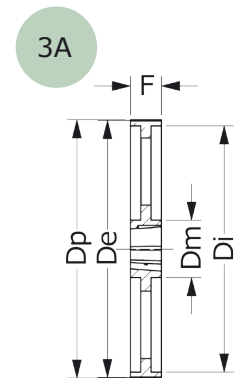
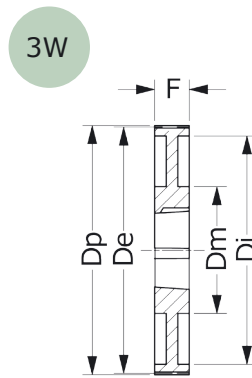


Tandremskiver - tommer fast nav H

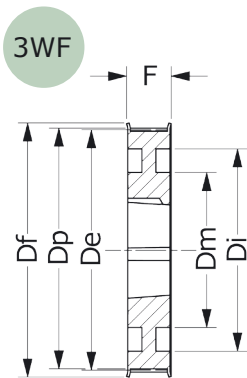

H		Deling: 12,75mm (1/2")				Materiale: Stål (S)						
		Støbejern (GG)										
Type	Matr.	Antal tænder	Rem-bredde	Type se s. 67	Dp	De	Df	Dm	Di	F	L	d
30-H-100	S	30	100	6F	121,28	119,9	128	80	-	31,8	45	14
32-H-100	S	32	100	6F	129,36	127,99	135	80	-	31,8	45	14
33-H-100	S	33	100	6F	133,4	132,03	140	80	-	31,8	45	14
34-H-100	S	34	100	6F	137,45	136,07	142	80	-	31,8	45	14
35-H-100	S	35	100	6F	141,49	140,12	150	80	-	31,8	45	14
36-H-100	S	36	100	6WF	145,53	144,16	150	80	118	31,8	45	14
38-H-100	S	38	100	6WF	153,62	152,24	158	80	123	31,8	45	14
40-H-100	S	40	100	6WF	161,7	160,33	168	80	134	31,8	45	14
42-H-100	S	42	100	6WF	169,79	168,41	175	80	140	31,8	45	14
44-H-100	S	44	100	6WF	177,87	176,5	184	80	150	31,8	50	14
45-H-100	GG	45	100	6WF	181,91	180,54	192	80	154	31,8	50	14
48-H-100	GG	48	100	6WF	194,04	192,67	200	90	166	31,8	50	14
49-H-100	GG	49	100	6W	198,08	196,71	-	90	170	31,8	50	19
50-H-100	GG	50	100	6W	202,13	200,75	-	90	174	31,8	50	19
52-H-100	GG	52	100	6W	210,21	208,84	-	90	182	31,8	50	19
58-H-100	GG	58	100	6A	234,47	233,09	-	90	207	31,8	50	19
60-H-100	GG	60	100	6A	242,55	241,18	-	90	215	31,8	50	19
70-H-100	GG	70	100	6A	282,98	281,61	-	100	255	31,8	55	19
72-H-100	GG	72	100	6A	291,06	289,69	-	100	263	31,8	55	19
82-H-100	GG	82	100	6A	331,49	330,12	-	100	304	31,8	55	19
84-H-100	GG	84	100	6A	339,57	338,2	-	100	312	31,8	55	19
94-H-100	GG	94	100	6A	380	378,63	-	120	352	31,8	60	19
96-H-100	GG	96	100	6A	388,08	386,71	-	120	360	31,8	60	19
106-H-100	GG	106	100	6A	428,51	427,14	-	120	401	31,8	60	19
116-H-100	GG	116	100	6A	468,93	467,56	-	120	441	31,8	60	19
118-H-100	GG	118	100	6A	477,02	475,65	-	120	449	31,8	60	19
120-H-100	GG	120	100	6A	485,1	483,73	-	120	458	31,8	60	19
150-H-100	GG	150	100	6A	606,38	605,01	-	120	579	31,8	60	19
152-H-100	GG	152	100	6A	614,47	613,09	-	120	587	31,8	60	19
154-H-100	GG	154	100	6A	622,55	621,18	-	120	595	31,8	60	19
156-H-100	GG	156	100	6A	630,64	629,26	-	120	603	31,8	60	19

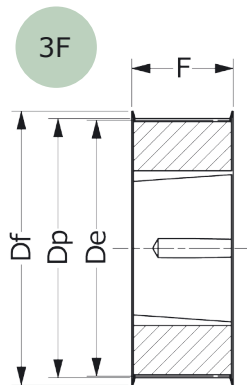

Tandremskiver - tommer, taperbøsning L



L Deling: 9,525mm (3/8")						Materiale: Stål (S)							
Støbejern (GG)													
Type	Matr.	Antal tænder	Rem-bredde	Type se s. 73	TB-nr.	Dp	De	Df	Dm	Di	F	S	R
18-L-50	S	18	50	8F	1108	54,57	53,81	60	45	-	19	22	3
19-L-50	S	19	50	8F	1108	57,61	56,84	64	45	-	19	22	3
20-L-50	S	20	50	8F	1108	60,64	59,88	66	48	-	19	22	3
21-L-50	S	21	50	8F	1108	63,67	62,91	70	48	-	19	22	3
22-L-50	S	22	50	8F	1108	66,7	65,94	75	51	-	19	22	3
23-L-50	S	23	50	8F	1108	69,73	68,97	79	54	-	19	22	3
24-L-50	S	24	50	8F	1108	72,77	72	79	54	-	19	22	3
25-L-50	S	25	50	8F	1108	75,8	75,04	83	56	-	19	22	3
26-L-50	S	26	50	8F	1108	78,83	78,07	87	60	-	19	22	3
27-L-50	S	27	50	8F	1108	81,86	81,1	87	62	-	19	22	3
28-L-50	S	28	50	8F	1108	84,89	84,13	91	65	-	19	22	3
30-L-50	S	30	50	8F	1108	90,96	90,2	97	70	-	19	22	3
32-L-50	S	32	50	8F	1108	97,02	96,26	102	74	-	19	22	3
36-L-50	S	36	50	8F	1108	109,15	108,39	115	85	-	19	22	3
40-L-50	S	40	50	8F	1610	121,28	120,51	128	88	-	19	25	3
44-L-50	S	44	50	8WF	1610	133,4	132,64	142	88	110	19	25	6
48-L-50	S	48	50	8WF	1610	145,53	144,77	150	88	120	19	25	6
60-L-50	S	60	50	7W	1610	181,91	181,15	-	92	166	19	25	6
72-L-50	GG	72	50	7A	1610	218,3	217,53	-	92	202	19	25	6
84-L-50	GG	84	50	7A	1610	254,68	253,9	-	92	236	19	25	6
96-L-50	GG	96	50	7A	2012	291,06	290,3	-	106	270	19	32	13
120-L-50	GG	120	50	7A	2012	363,83	363,07	-	106	343	19	32	13
18-L-75	S	18	75	3F	1108	54,57	53,81	60	-	-	25	25	-
19-L-75	S	19	75	3F	1108	57,61	56,84	64	-	-	25	25	-
20-L-75	S	20	75	3F	1108	60,64	59,88	66	-	-	25	25	-
21-L-75	S	21	75	3F	1108	63,67	62,91	70	-	-	25	25	-
22-L-75	S	22	75	3F	1108	66,7	65,94	75	-	-	25	25	-
23-L-75	S	23	75	3F	1108	69,73	68,97	79	-	-	25	25	-
24-L-75	S	24	75	3F	1108	72,77	72	79	-	-	25	25	-
25-L-75	S	25	75	3F	1108	75,8	75,04	83	-	-	25	25	-
26-L-75	S	26	75	3F	1108	78,83	78,07	87	-	-	25	25	-
27-L-75	S	27	75	3F	1108	81,86	81,1	87	-	-	25	25	-
28-L-75	S	28	75	3F	1108	84,89	84,13	91	-	-	25	25	-
30-L-75	S	30	75	3F	1108	90,96	90,2	97	-	-	25	25	-
32-L-75	S	32	75	3F	1108	97,02	96,26	102	-	-	25	25	-
36-L-75	S	36	75	3F	1610	109,15	108,39	115	-	-	25	25	-
40-L-75	S	40	75	3F	1610	121,28	120,51	128	-	-	25	25	-
44-L-75	S	44	75	3WF	1610	133,4	132,64	142	90	110	25	25	-
48-L-75	S	48	75	3WF	1610	145,53	144,77	150	92	120	25	25	-
60-L-75	S	60	75	3W	1610	181,91	181,15	-	92	166	25	25	-
72-L-75	GG	72	75	3A	1610	218,3	217,53	-	92	202	25	25	-
84-L-75	GG	84	75	7A	2012	254,68	253,9	-	92	236	25	32	-
96-L-75	GG	96	75	7A	2012	291,06	290,3	-	106	270	25	32	3,5
120-L-75	GG	120	75	7A	2012	363,83	363,07	-	106	343	25	32	3,5
18-L-100	S	18	100	5F	1108	54,57	53,81	60	-	38	31	22	9
19-L-100	S	19	100	5F	1108	57,61	56,84	64	-	38	31	22	9
20-L-100	S	20	100	5F	1108	60,64	59,88	66	-	45	31	22	9
21-L-100	S	21	100	5F	1108	63,67	62,91	70	-	45	31	22	9
22-L-100	S	22	100	5F	1108	66,7	65,94	75	-	48	31	22	9
23-L-100	S	23	100	5F	1108	69,73	68,97	79	-	52	32	22	10
24-L-100	S	24	100	5F	1108	72,77	72	79	-	52	32	22	10
25-L-100	S	25	100	5F	1108	75,8	75,04	83	-	54	32	22	10
26-L-100	S	26	100	5F	1108	78,83	78,07	87	-	60	32	22	10
27-L-100	S	27	100	5F	1108	81,86	81,1	91	-	60	32	22	10
28-L-100	S	28	100	5F	1108	84,89	84,13	91	-	65	32	22	10
30-L-100	S	30	100	5F	1210	90,96	90,2	97	-	71	32	25	7
32-L-100	S	32	100	5F	1210	97,02	96,26	102	-	75	32	25	7
36-L-100	S	36	100	5F	1610	109,15	108,39	115	-	86	32	25	7
40-L-100	S	40	100	5F	1610	121,28	120,51	128	-	96	32	25	7
44-L-100	S	44	100	5WF	1610	133,4	132,64	142	90	110	32	25	-



Tandremskiver - tommer, taperbøsning L/H

L		Deling: 9,525mm (3/8")				Materiale: Stål (S)							
Støbejern (GG)													
Type	Matr.	Antal tænder	Rem-bredde	Type se s. 73	TB-nr.	Dp	De	Df	Dm	Di	F	S	R
48-L-100	S	48	100	5WF	1610	145,53	144,77	150	92	120	32	25	7
60-L-100	S	60	100	9W	1610	181,91	181,15	-	92	166	32	25	3,5
72-L-100	GG	72	100	3A	2012	218,3	217,53	-	92	202	32	32	-
84-L-100	GG	84	100	3A	2012	254,68	253,9	-	92	236	32	32	-
96-L-100	GG	96	100	3A	2012	291,06	290,3	-	106	270	32	32	-
120-L-100	GG	120	100	3A	2012	363,83	363,07	-	106	343	32	32	-

H		Deling: 12,75mm (1/2")				Materiale: Stål (S)							
Støbejern (GG)													
Type	Matr.	Antal tænder	Rem-bredde	Type se s. 73	TB-nr.	Dp	De	Df	Dm	Di	F	S	R
16-H-100	S	16	100	5F	1108	64,68	63,31	70	-	45	31	22	9
18-H-100	S	18	100	5F	1210	72,77	71,39	79	-	52	31	25	6
19-H-100	S	19	100	5F	1210	76,81	75,44	83	-	56	31	25	6
20-H-100	S	20	100	5F	1210	80,55	79,48	87	-	60	31	25	6
21-H-100	S	21	100	5F	1210	84,89	83,52	91	-	64	32	25	7
22-H-100	S	22	100	5F	1210	88,94	87,56	93	-	67	32	25	7
23-H-100	S	23	100	5F	1610	92,98	91,61	97	-	70	32	25	7
24-H-100	S	24	100	5F	1610	97,02	95,65	102	-	74	32	25	7
25-H-100	S	25	100	5F	1610	101,06	99,69	106	-	77	32	25	7
26-H-100	S	26	100	5F	1610	105,11	103,73	112	-	82	32	25	7
27-H-100	S	27	100	5F	1610	109,15	107,78	115	-	85	32	25	7
28-H-100	S	28	100	5F	1610	113,19	111,82	120	-	90	32	25	7
30-H-100	S	30	100	5F	1610	121,28	119,9	128	-	98	32	25	7
32-H-100	S	32	100	5WF	1610	129,36	127,99	135	80	106	32	25	7
36-H-100	S	36	100	5WF	1610	145,53	144,16	150	92	121	32	25	7
40-H-100	S	40	100	5WF	1610	161,7	160,33	168	92	138	32	25	7
44-H-100	S	44	100	3WF	2012	177,87	176,5	184	106	152	32	32	-
48-H-100	S	48	100	3WF	2012	194,04	192,67	200	106	169	32	32	-
60-H-100	GG	60	100	9A	2012	242,55	241,18	-	92	223	34	32	1
72-H-100	GG	72	100	9A	2012	291,06	289,69	-	92	270	34	32	1
84-H-100	GG	84	100	9A	2012	339,57	338,2	-	92	318	34	32	1
96-H-100	GG	96	100	7A	2517	388,08	386,71	-	106	366	34	45	5,5
120-H-100	GG	120	100	7A	2517	485,1	483,73	-	106	462	34	45	5,5