

Stainless Steel- Adjusting screws

for bearing blocks GN 828

SPECIFICATION

Coding

Coding **S**: with standard scale 0...0.5, 10 graduations

Stainless Steel AISI 304 **NG**

matte shot-blasted

Scale

laser-engraved, black discharged



INFORMATION

Stainless Steel-Adjusting screws GN 827 are used in combination with bearing blocks GN 828 (see page) for simple adjustment and positioning tasks.



For processing and assembly equipment on which attachments and mechanisms must be regularly exchanged, positioned and adjusted, combining these with bearing blocks GN 828 (see page) of type UA and UB allows for particularly simple adjustments.

ACCESSORY


- Bearing blocks GN 828 (see page)

TECHNICAL INFORMATION

- Stainless Steel characteristics (see page A26)

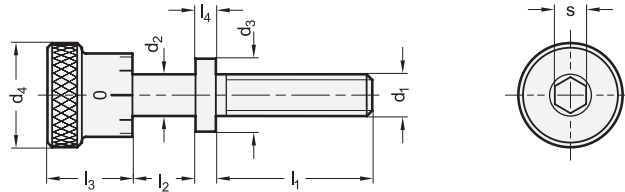

Application example

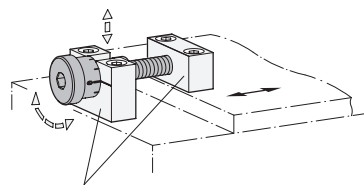

Bearing blocks GN 828

GN 827

STAINLESS STEEL

Description	d1	l1	d2 -0.4/ -0.6	d3	d4	l2 +0.1	l3	l4	s	△
GN 827-M6x1-20-NG-S	M6x1	20	6	10	16	10.1	14	2.9	5	21
GN 827-M6x1-35-NG-S	M6x1	35	6	10	16	10.1	14	2.9	5	24
GN 827-M6x1-50-NG-S	M6x1	50	6	10	16	10.1	14	2.9	5	26
GN 827-M8x1-30-NG-S	M8x1	30	8	14	20	12.1	16	3.9	6	46
GN 827-M8x1-45-NG-S	M8x1	45	8	14	20	12.1	16	3.9	6	51
GN 827-M8x1-60-NG-S	M8x1	60	8	14	20	12.1	16	3.9	6	56
GN 827-M10x1-40-NG-S	M10x1	40	10	16	24	15.1	18	5.9	8	85
GN 827-M10x1-60-NG-S	M10x1	60	10	16	24	15.1	18	5.9	8	94
GN 827-M10x1-80-NG-S	M10x1	80	10	16	24	15.1	18	5.9	8	106